

Ha·TEC | AGGREGATE

professional-line portable


portable power generator HH 7001

Destination of unit – simple single-phase receivers which do not require precise control voltage level (with the exception of welding machines) - eg. electric tools, central heating pumps, or heating devices.

powered by



Pictures for reference only

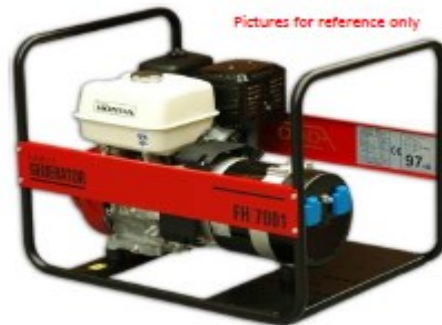

TECHNICAL SPECIFICATIONS

Max Power	KVA	6,4
Rated Power	KVA	5,8
Rated current	Amps	25,2
Nominal voltage	VAC	230
Frequency	Hz	50
Sound power level (L _{WA})	dB	97dB
Dimensions L x W x H	mm	775x565x595mm
Weight	kg	77Kg

ENGINE	Honda	GX 390
Power at 3000 rpm./min.	KW	7,4
Fuel type	95	unleaded
Fuel tank capacity	l	6,2l
Fuel consumption	l/h	2,7l
Autonomy (100% load)	h	2,3h
Engine oil	SAE	R4L (10W30)
Engine oil pan capacity	l	1,3l
Starting system	Manual	Reverse rope

ALTERNATOR

Typ	Synchron
Protection degree	IP23

Ha·TEC | AGGREGATE

professional-line portable


portable power generator HH 7001

Destination of unit – simple single-phase receivers which do not require precise control voltage level (with the exception of welding machines) - eg. electric tools, central heating pumps, or heating devices.

powered by



Pictures for reference only

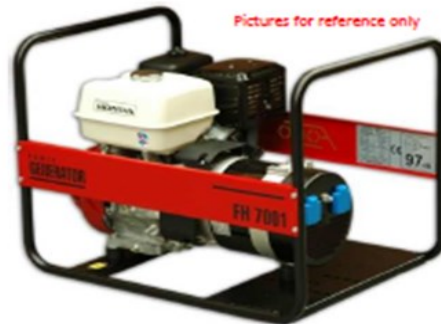

STANDARD EQUIPMENT

2x Socket 16 A 1-phase

Thermal switch

Low oil pressure switch

OPTINAL EQUIPMENT

Socket 32A 1-phase	N° 481032
Operating hours counter	N° 810006
Grounding kit	N° 460001
Transport set	N° 411000
RCD protection	N° 460116
Fuel tank 20l	N° 460101

Specification may change without notice